




ETN





Single skin metal roofs

Portrait Orientation

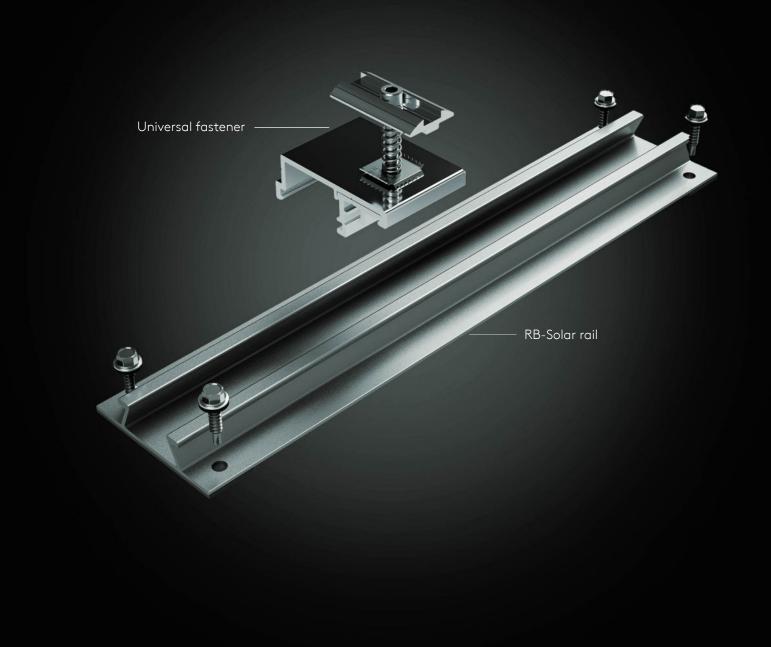

## THE ADVANTAGES OF THE RB-SOLAR SYSTEM.

- Possibility of custom-made rails (excluding ETN).
- Adaptable from the gutter to the ridge.
- The universal spring loaded clamp provides easy and fast installation by clipping onto the mini rail
- Fitted EPDM strips ensure waterproofing around screws



## Contact Details

## FR

## Dome Solar

3 rue Marie Anderson I 44400 REZÉ

T: +33 (0)2 40 67 92 92 E: info@dome-solar.com www.dome-solar.com/en/

For individual department contact details please visit www.dome-solar.com/en/contact



Dome Solar reserves the right to amend product specifications without prior notice. Product thicknesses shown in this document should not be taken as being available ex-stock and reference should be made to the current Dome Solar price-list or advice sought from Dome Solar's Customer Service Department. The information, technical details, and fixing instructions. Included in this literature are given in good faith and apply to uses described. Recommendations for use should be verified for suitability and compliance with actual requirements, specifications, and any applicable laws and regulations. For other applications or conditions of use, Dome Solar offers a Technical Advisory Service, the advice of which should be sought for uses of Dome Solar products that are not specifically described herein.

To ensure you have the most up-to-date and accurate product information, please scan the QR code above.

DOME SOLAR Photovoltaic Solutions 3 rue Marie Anderson – 44400 Rezé (Nantes) – France S.A.S. DOME SOLAR with a capital of 500 000 Euros – APE 2599B – R.C.S. Nantes 509 182 309 –  $N^{\circ}$  TVA FR5750918230

