



ATec
21/15-53



Single skin
metal roofs



Sandwich
panels




Landscape
orientation



Green list
C2P



Low-carbon
green steel

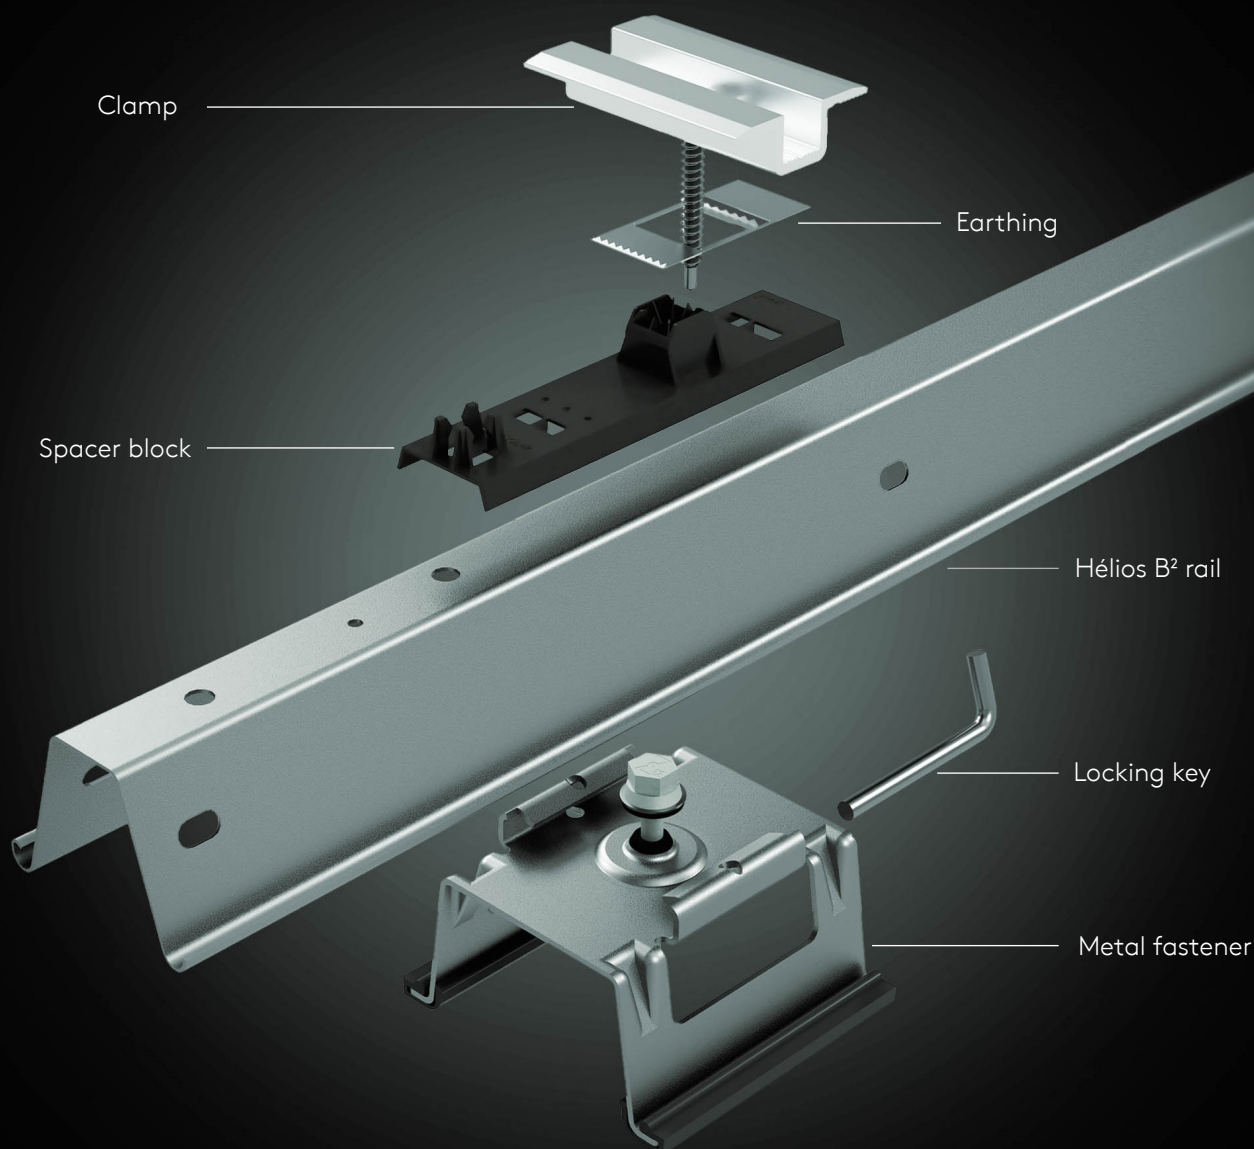

THE ADVANTAGES OF THE HELIOS B² SYSTEM.

- Fastening only in the purlin without drilling the roof metal sheet.
- Custom cut to measure rails to the width of the PV module for quick installation.
- Large ventilation space under the module (92mm air gap).



Contact Details

EN

Dome Solar


3 Marie Anderson Street | 44400 REZÉ | France

T: +33 (0)2 40 67 92 92

E: info@dome-solar.com

www.dome-solar.com

For the contact details of each department, please visit
www.dome-solar.com/contact



Dome Solar reserves the right to modify product specifications without prior notice. The products listed in this document should not be considered as stock items, and reference should be made to the current Dome Solar price list or advice sought from the Dome Solar customer service. The information, technical details, installation instructions, etc., included in this documentation are given in good faith and apply to the described uses. Usage recommendations must be verified for their suitability and compliance with actual requirements, specifications, and all applicable laws and regulations. For other applications or usage conditions, Dome Solar offers a technical advisory service, which should be consulted for the use of Dome Solar products not specifically described in this document.

To ensure you are consulting the most recent and accurate product information, please scan the QR code above.

DOME SOLAR Photovoltaic Solutions

3 Marie Anderson Street – 44400 Rezé (Nantes) – France

S.A.S. DOME SOLAR with a share capital of 500,000 Euros – APE 2599B – R.C.S. Nantes 509 182 309 –

VAT No. FR5750918230

